

Pentair Water® Reverse Osmosis System



At last, there's an innovation that offers customers an abundant supply of RO water, without the need for electric pumps or bulky storage tanks.

The Pentair Water® Reverse Osmosis System delivers up to hundreds of gallons per day *using typical line pressure**, which eliminates the need for a supplemental pump in most applications. That's enough capacity for many small commercial applications, at the price of a residential system. The Pentair Water RO features a continuous flow design, so there's no need to clear space for a storage tank.

Profitably sell quality water systems for residential kitchens or across a full range of commercial settings:

- Ice makers
- Steamers
- Coffee makers
- Photography processing
- Water coolers
- Business offices
- Restaurants
- Humidifiers
- Aquariums
- Misters
- Pubs
- Many more profitable possibilities

*Based on 50 psi (3.44 bar), 77°F (25°C), 750 ppm NaCl

Pentair Water® Reverse Osmosis System



Pro Quality That's Right At Home

By bridging the gap between commercial and residential users, you'll open more customer doors with the Pentair Water Reverse Osmosis System.

Homeowners will love the convenience of purer, more refreshing water without the need to rearrange their home spaces for pumps and tanks. Business customers get a compact, reliable system that better suits the flow requirements of small and mid-sized businesses, at a cost that's a fraction of what they'd pay for most commercial RO systems.

The profitability doesn't stop on installation day. Replacement filters are available only from Pentair Water dealers like you, so each RO system is an open door to new customer opportunities for years to come.

Features and Benefits

- **Continuous Flow** – No storage tank needed.
- **Works with Line Pressure** – > 40 psi / 2.76 bar
- **No Pump or Electricity**
- **Never Runs Dry** – On-demand flow system will create hundreds of gallons per day.
- **Consistent Membrane Efficiency**
- **High Recovery System** – Less wasted water goes down the drain.
- **Tough Stuff** – Constructed of high impact plastic for years of dependability.
- **Virtually Maintenance Free** – Change cartridges fast and easy – no scrubbing or cleaning.
- **No Tanks!** – Never again worry about contamination or loss of tank pressure.
- **Sleek Styling** – Distinctive appliance-style design appeals to customers.
- **Complete Product Literature and Training Support**

Installation's a Snap

Quick latch snaps into place and locks down all four tubing connections in one easy step.

Steady Stream of Income

Replacement parts, filters are available only through professional channels.

Never Runs Dry

Continuous flow provides up to hundreds of gallons per day.

Refreshment on Tap

Custom high-flow faucet (with air gap) custom made for this system.

Snug Size

Compact, upright profile has a small footprint and needs no fancy mounting.



System Comparison

	Pentair Water RO	Standard RO
Average Daily Production Rate	Hundreds of gallons	10-50 GPD
Water Storage Tank	Optional	Integral part of system
System Efficiency*	22.7%	As little as 5%

*Efficiency rating is identical to recovery rating when the system is tested without a storage tank or when a storage tank is bypassed.

Minimum and Maximum Operating Conditions

Condition**	Minimum	Maximum
Inlet Pressure	40 psi (2.76 bar)	80 psi (5.52 bar)
Inlet Temperature	40°F (4.44°C)	100°F (37.78°C)
Inlet TDS	50 mg/L	2,000 mg/L
Inlet Hardness	0 mg/L - (0 grain)	171 mg/L - (10 grain)
Inlet Chlorine	0 mg/L	1.0 mg/L
Inlet Iron	0 mg/L	0.1 mg/L
Inlet Manganese	0 mg/L	0.05 mg/L

**System is designed for use on potable water sources only.

Tubing/Fitting Dimensions

Inlet Tubing	4 feet of 1/2" natural tubing (1.22 meters of 12.7 mm natural tubing)
Concentrate Tubing	4 feet of 3/8" black tubing (1.22 meters of 9.53 mm black tubing)
Permeate Tubing	4 feet of 3/8" blue tubing (1.22 meters of 9.53 mm blue tubing)
Drain Tubing (for airgap installation)	3 feet of 1/2" red tubing (0.91 meters of 12.7 mm red tubing)
Drain Connection	3/8" or 1/2" (9.53 mm or 12.7 mm)
Carbon Post-Filter	3/8" quick disconnect fittings (9.53 mm quick disconnect fittings)

Inlet Connectors




Option 1	1/2" x 1/2" x 1/2" tee (12.7 mm x 12.7 mm x 12.7 mm tee)
Option 2	5/8" x 5/8" x 1/2" tee (15.875 mm x 15.875 mm x 12.7 mm tee)
Option 3	1/2" x 1/2" threaded x 1/2" tee (12.7 mm x 12.7 mm threaded x 12.7 mm tee)
Option 4	0.59" x 0.59" x 1/2" tee (15 mm x 15 mm x 12.7 mm tee)

Filter/Membrane Performance Specifications

Filter Type	Dimensions		Flow Rate***	Average Life
	Length	Diameter		
Carbon Pre-Filter	17.0" (43.2 cm)	2.9" (7.4 cm)	3.75 GPM (14.2 LPM)	6-12 months, 10,000 gal (37,850 liters)
RO Element	18.75" (47.6 cm)	3.16" (8.0 cm)	0.25 GPM (0.95 LPM)	2-4 years
Carbon Post-Filter	10.0" (25.4 cm)	2.0" (5.1 cm)	0.75 GPM (2.8 LPM)	6-12 months


***Based on: 50 psi (3.44 bar), 77°F (25°C), 750 mg/L NaCl, 22.7% recovery, 1.0 mg/L inlet chlorine.

Outline Dimensions in Inches (cm)

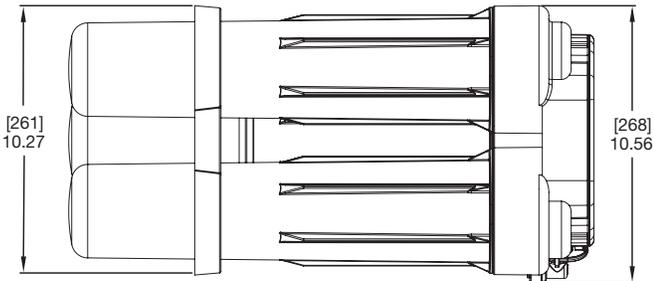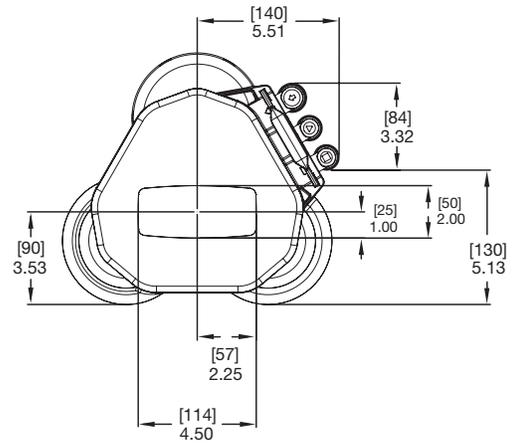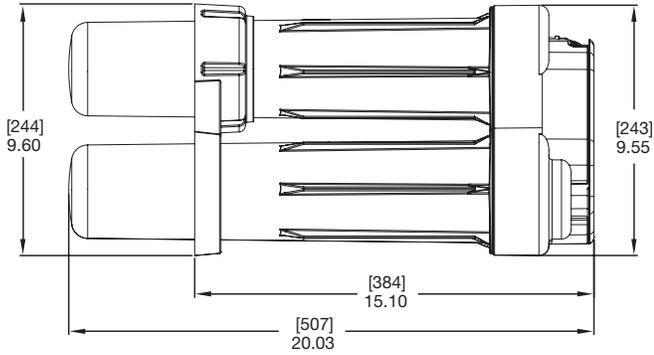

Performance - Flow Rate Characteristics*

Based on 750 ppm TDS Inlet Water

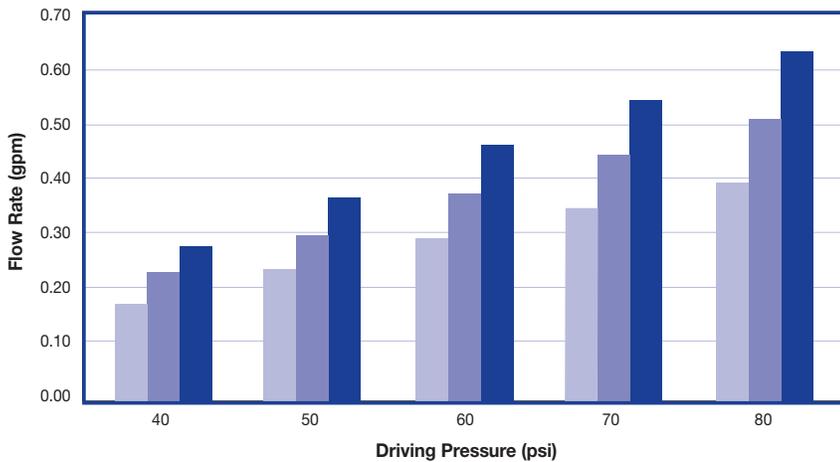

50° F 65° F 80° F

Flow Adjustment Based on TDS

Estimated Flow Change from 750ppm NaCl/RO = $-0.0002 \text{ (TDS)} + 0.15$

*Estimated flow based on internal test data. Actual performance may vary.



20580 Enterprise Avenue
Brookfield, WI 53045
Tel: 262.784.4490
Fax: 262.784.7794

5730 North Glen Park Road
Milwaukee, WI 53209
Tel: 262.238.4400
Fax: 262.238.4402

©2010 Pentair Residential Filtration, LLC
310134 Rev A MR10

Customer Care: 800.279.9404 www.pentairaquapro.com